
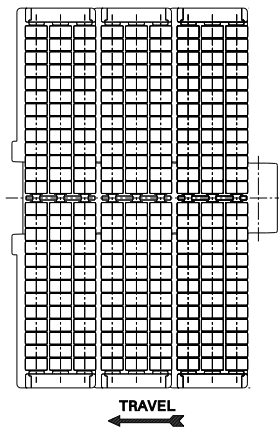
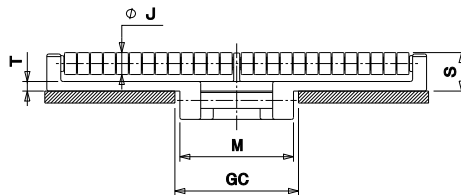


**Type:** Straight running, Heavy duty hinge


**Hinge dimension (M):** 57 mm (2.244")

**Pin and roller shaft material:** Cold rolled austenitic stainless steel

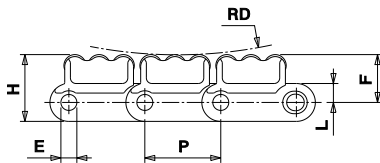


| Dimension | mm   | inches |
|-----------|------|--------|
| P         | 38,1 | 1.5    |
| M         | 57   | 2.244  |
| L         | 9,5  | .374   |
| H         | 33,5 | 1.319  |
| E         | 8    | .315   |
| F         | 24   | .945   |
| T         | 4,8  | .189   |
| J         | 11   | .433   |
| RD        | 300  | 11.811 |
| GC        | 60   | 2.362  |

**LBP 8257 UP K 7½**

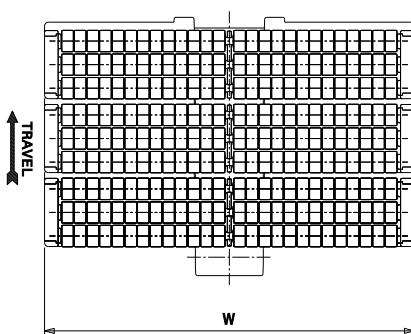

**LBP 8257 UP K 10  
LBP 8257 UP K 12**

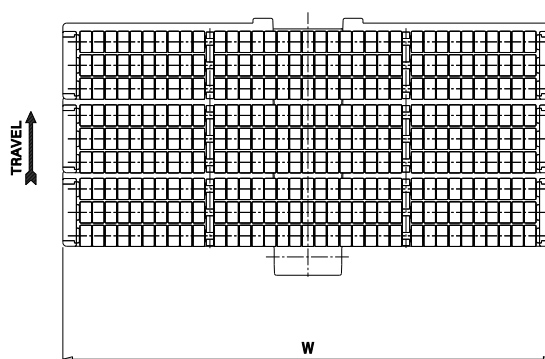

**LBP 8257 (Straight Running - Heavy Duty Hinge)**

| REGINA REF.      | CHAIN WIDTH<br>W |        | CHAIN THICKNESS<br>S |        | WORKING LOAD<br>(25°C / 77°F) |     | CHAIN WEIGHT |        | PLATE<br>MATERIAL |
|------------------|------------------|--------|----------------------|--------|-------------------------------|-----|--------------|--------|-------------------|
|                  | mm               | inches | mm                   | inches | N                             | lbs | Kg/m         | lbs/ft |                   |
| LBP 8257 UP K 7½ | 190,5            | 7.50   | 19,3                 | 0.760  | 3910                          | 879 | 5,47         | 3.68   | UP                |
| LBP 8257 UP K 10 | 254,0            | 10.00  | 19,3                 | 0.760  | 3910                          | 879 | 6,93         | 4.66   | UP                |
| LBP 8257 UP K 12 | 304,8            | 12.00  | 19,3                 | 0.760  | 3910                          | 879 | 8,09         | 5.44   | UP                |

Standard length: 1,524 m ( 5 feet )